


- Stainless steel sensor with Hastelloy diaphragm
- ΔP -Ranges from 50 mbar to 25 bar
- Accuracy: $\leq 0.2\%$
- One side overload 100 / 250 bar
- Static pressure max. 100 / 250 bar
- Analog output: 4...20 mA, 2-wire

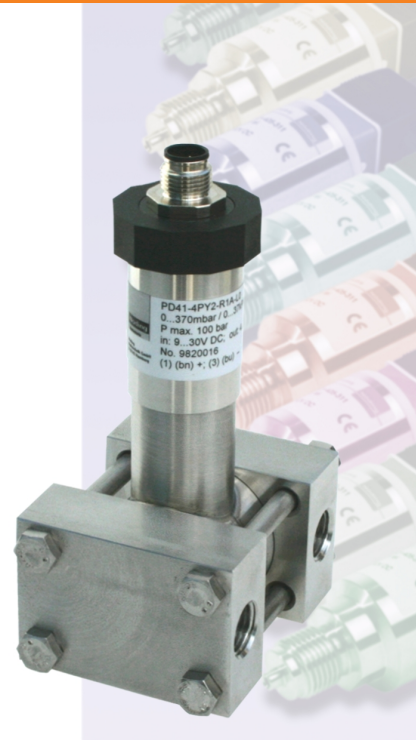

Differential pressure transmitter PD 41

Technical data:

ΔP -Range:	0...50 mbar to 0...25 bar
Output:	4...20 mA, 2-wire signal range 3.8...20.5 mA
Accuracy:	$\leq \pm 0.2\%$ FS @ 25°C
Hysteresis:	$\leq \pm 0.05\%$ FS
Static pressure:	R = 100 bar (standard flange) S = 250 bar (heavy duty flange)
Static pressure effect:	$\leq \pm 0.1\%$ FS/10 bar
Time constant T_{90} :	200 ms
Power supply:	9...30V DC
Ambient temperature:	-25...85 °C
Process temperature:	-25...120 °C
Temperature coef.:	$\leq \pm 0.02\%$ FS/K
Long term stability:	$\leq \pm 0.1\%$ FS p. a.
Process connection:	1/4-18 NPT, 1.4404 (316L)
Diaphragm:	Hastelloy (C276)
Housing:	stainless steel 1.4301 (304)
Electrical connection:	connector EN 175301-803A, IP67 connector M12x1, IP 67 Quickon-connector, IP 67 cable connection IP67

Nöding

Meßtechnik

ΔP-Ranges

ranges	code	ranges	code
0...50 mbar / 0...5 kPa	PB0	-25..0.25 mbar / -2.5..0.25 kPa	BE6
0...60 mbar / 0...6 kPa	PA9	-50..0.50 mbar / -5..0.5 kPa	BB0
0...75 mbar / 0...7.5 kPa	PY1	-60..0.60 mbar / -6..0.6 kPa	BA9
0...100 mbar / 0...10 kPa	P00	-75..0.75 mbar / -7.5..0.75 kPa	BY1
0...160 mbar / 0...16 kPa	P01	-100..0.100 mbar / -10..0.10 kPa	B00
0...200 mbar / 0...20 kPa	PB1	-160..0.160 mbar / -16..0.16 kPa	B01
0...250 mbar / 0...25 kPa	P02	-200..0.200 mbar / -20..0.20 kPa	BB1
0...300 mbar / 0...30 kPa	PX5	-250..0.250 mbar / -25..0.25 kPa	B02
0...370 mbar / 0...37 kPa	PY2	-300..0.300 mbar / -30..0.30 kPa	BX5
0...400 mbar / 0...40 kPa	P03	-370..0.370 mbar / -37..0.37 kPa	BY2
0...500 mbar / 0...50 kPa	PB7	-400..0.400 mbar / -40..0.40 kPa	B03
0...600 mbar / 0...60 kPa	P04	-500..0.500 mbar / -50..0.50 kPa	BB7
0...1 bar / 0...100 kPa	P05	-600..0.600 mbar / -60..0.60 kPa	B04
0...1.6 bar / 0...160 kPa	P06	-1..0.1 bar / -100..0.100 kPa	B05
0...2 bar / 0...200 kPa	PB3	-1.6..0.16 bar / -160..0.160 kPa	B06
0...2.5 bar / 0...250 kPa	P07	-2..0.2 bar / -200..0.200 kPa	BB3
0...3 bar / 0...300 kPa	PX3	-2.5..0.25 bar / -250..0.250 kPa	B07
0...4 bar / 0...400 kPa	P08	-3..0.3 bar / -300..0.300 kPa	BX3
0...5 bar / 0...500 kPa	PF1	-4..0.4 bar / -400..0.400 kPa	B08
0...6 bar / 0...600 kPa	P09	-5..0.5 bar / -500..0.500 kPa	BF1
0...10 bar / 0...1 MPa	P10	-6..0.6 bar / -600..0.600 kPa	B09
0...16 bar / 0...1.6 MPa	P11	-10..0.10 bar / -1..0.1 MPa	B10
0...20 bar / 0...2 MPa	PB5	-16..0.16 bar / -1.6..0.16 MPa	B11
0...25 bar / 0...2.5 MPa	P12	-20..0.20 bar / -2..0.2 MPa	BB5
non-standard range	P99	-25..0.25 bar / -2.5..0.25 MPa	B12
		non-standard range	B99

Output signal

4 4...20 mA 2-wire (signal range 3.8...20.5 mA)

Range

Measurement range see table

Process connection and material

 R standard flange Pmax. 100 bar
 1/4-18 NPT, 1.4404

 S heavy duty flange Pmax. 250 bar
 1/4-18 NPT, 1.4404

 M heavy duty flange Pmax. 160 bar
 M10, 1.4404

Sensor seal

1 FPM (Viton) Standard

3 EPDM

5 Chemraz 505

Electrical connection

0 5m cable, IP 67

1 connector EN 175301-803A IP 67

6 2m cable, IP 67

A connector M12x1, IP 67

F Quickon-connector IP 67

H 10m cable, IP 67

9 others (on-request)

Mounting position

S horizontal pressure connection

L vertical, top low connection

H vertical, top high connection


Options

0 none





PD41-

Dimensions (mm)



Type R

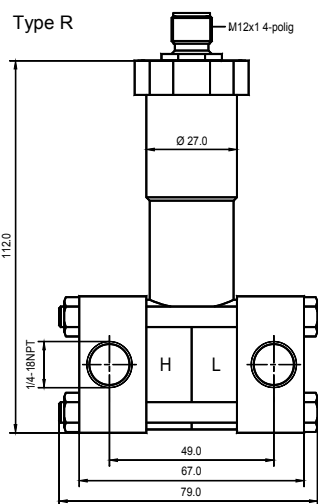

Type S

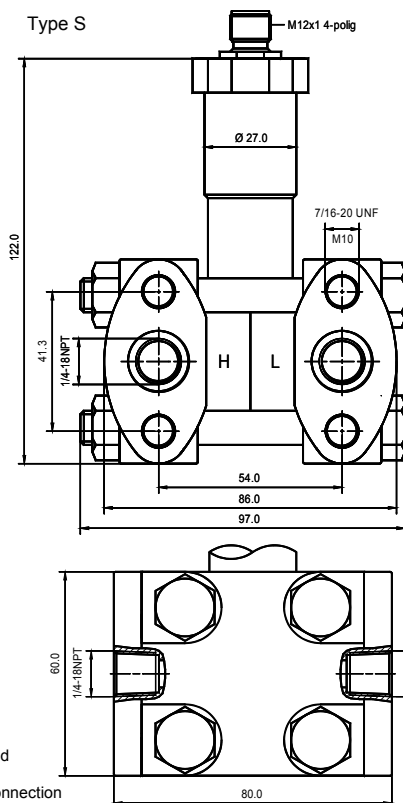


Accessories (optional)


 EV1-N
vent valve

 VS1-N
plug

It is necessary to define the mounting position to avoid position-dependent error.
 Standard mounting position is horizontal, pressure connection left / right (as shown above)

Electrical connections

connector EN175301-803A


 4...20 mA 2-wires
 PIN1 Signal +
 PIN2 Signal -


Quickon connector


 4...20 mA 2-wires
 PIN1 Signal +
 PIN2 Signal -

connector M12, 4-polig


 4...20 mA 2-wires
 PIN1 Signal +
 PIN3 Signal -

cable connection


 4...20 mA 2-wires
 brown Signal +
 white Signal -

Modifications reserved without notice 11.11