



Analog timer

P992364

PRESENTATION:

The analog timer is a plug-on controller specially design for drain valves. The draining time can be set with the "ON" trimmer between 0.5 and 10 seconds. The "OFF" trimmer allows to adjust the delay time between two draining cycles from 0.5 to 45 minutes. The unit is ready to control the valve as soon as the power is switched on. The ON/OFF sequence will be repeated so long as the unit is fed. Two LEDs indicate the output status. A "TEST" button is provided to check the cycle settings and to restart the control sequence from the output status "ON".

USE:


Condensate drain systems control
Timed systems.

TECHNICAL DATA:

| | |
|--------------------------|---|
| Supply voltage: | 24 to 240V AC/DC $\pm 10\%$ 50/60Hz |
| Current consumption | 4mA Max. |
| Operating temperature | -10°C +50°C |
| Environmental protection | assembled IP 65, NEMA IV |
| Switch capacity | 1 Amp |
| Inrush current | 10 Amps for 10mSec. |
| Duty cycles | 100% |
| Repeat accuracy | $\pm 1\%$ |
| Scale accuracy | $\pm 10\%$ |
| Reset/test | Manual touch switch |
| Printed circuit board | UL 94V-0 |
| Connection | EN 175301-803 |
| On time | 0.5 to 10 seconds |
| Off time | 0.5 to 45 minutes |
| Indicators | Led |
| Design standard | DIN EN 60664-1;VDE 0110-1 |
| Approvals | EAC (Eurasian Customs Union) UL Recognized |




DIMENSIONS:

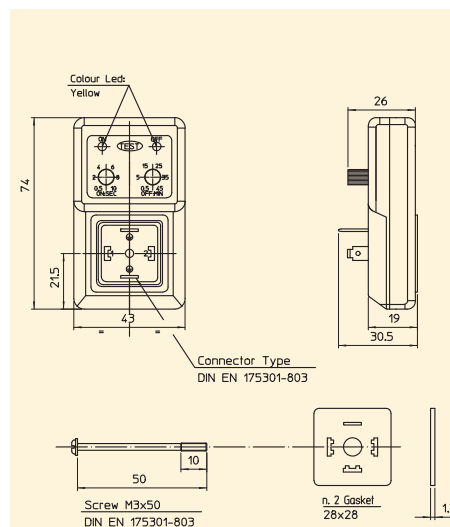

DESCRIPTION:

- | | |
|-----------------------------|-----------------------|
| 1. Test button | |
| 2. Yellow Led: | output power "OFF" |
| 3. Yellow Led: | output power "ON" |
| 4. Trimmer "ON": regulation | time "ON" |
| 5. Trimmer "OFF": pause | time regulation "OFF" |

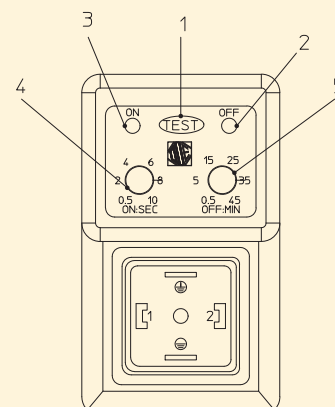

Note

The timer is supplied with a n. 2 seals and a locking screw.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.