



GDV Coil housing material: PET - Black polyethylene - class H (180°C)
Winding: In class H
Electrical connections: With connector EN 175301-803 paragraph 5.3.1
Protection degree IP65 EN 60529 (DIN 40050)

NOMINAL VOLTAGES TOLERANCES: DC +10% -5%; AC +10% -15%

(According to Directive 94/9/CE ATEX)
II 3G Ex nA IIC T3 Gc
II 3D Ex tc IHC T200°C Dc IP65

CODE	POWER [VA]		VOLTAGE [V]	FREQUENCY [Hz]	ED [%]	AMBIENT TEMPERATURE	APPROVALS	DRAWING REFERENCE
	Inrush	Holding						


AC Coils

GDV14024D3	27	43	24 ~	50/60	100	-20°C +80°C°	-	1
GDV14110A3	27	43	110 ~ 120 ~	50 60	100	-20°C +80°C°	-	1
GDV14230A3	27	43	230 ~ 240 ~	50 60	100	-20°C +80°C°	-	1

CODE	POWER [W]	VOLTAGE [V]	ED [%]	AMBIENT TEMPERATURE	APPROVALS	DRAWING REFERENCE
------	-----------	-------------	--------	---------------------	-----------	-------------------

DC Coils

GDV14024C3	14	24 =	100	-20°C +80°C°	-	1
------------	----	------	-----	--------------	---	---

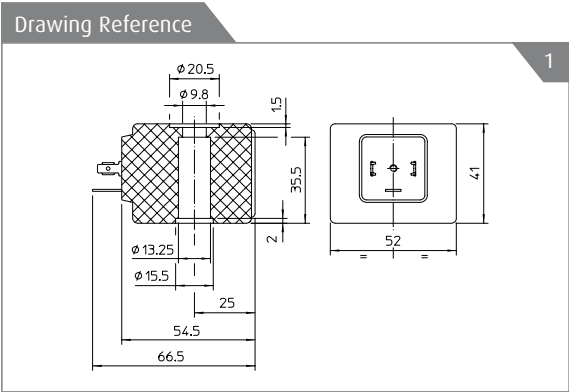

Note
The coil to comply Atex protection category mentioned above will be supplied only with connector ATEX type Ex II 3GD IP65.
ODE code has to be ordered separately: 992221
Available on request and with minimum quantities.